

DESCRIZIONE:

STRAIGHT TAP

Codice disegno: 13050.2MPRCA

APPLICATION:

- Wall mounting - Vertical mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 20 Bars

SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

MATERIALS:

- Brass
- Handle in PP

HEADWORK SEALING:


- PTFE temperature working range: 0 - 100°

CONNECTION TAP:


- Male thread G1/2"

STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

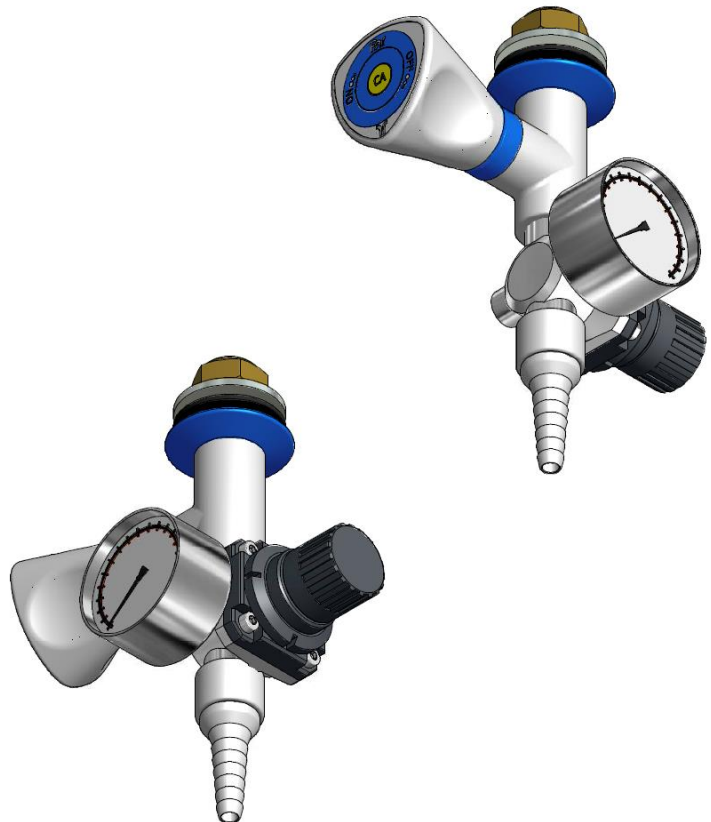

ADJUSTABLE PRESSURE 0-8 BARS

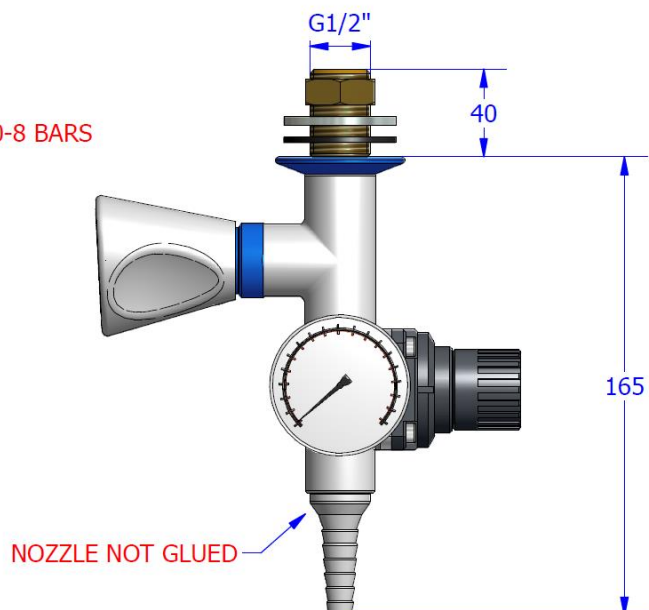

WARRANTY 2 YEARS