

DESCRIZIONE: SINGLE NOZZLE BENCH SPRAY UNIT WALL 45° EXTRACTION

Codice disegno: 32302MDS

APPLICATION:

- Bench mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 5 Bars
- Flow rate limited to 7L/min

SURFACE PROTECTION:

- Chemical nikel plating

MATERIALS:

- Brass
- ABS
- EPDM
- Stainless steel

HEADWORK SEALING:


- EPDM temperature working range: 0-70°

CONNECTION TAP:



- Swivelling cup G1/2" female

STANDARD AND NORMS:

- DIN4844-2-D and BGV A8
- DIN1988 - DIN EN 1717
- DIN EN 15154-2:2006
- ANSA Z358.1-2004

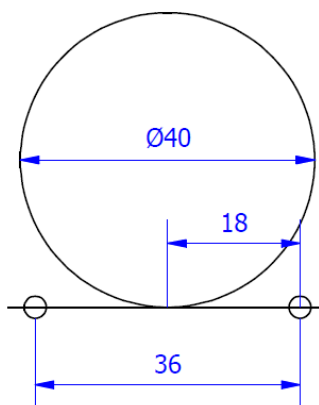

Two small holes diameter for fixation depend by the used screw, if self threading or not. Max usable screw dimension M4.

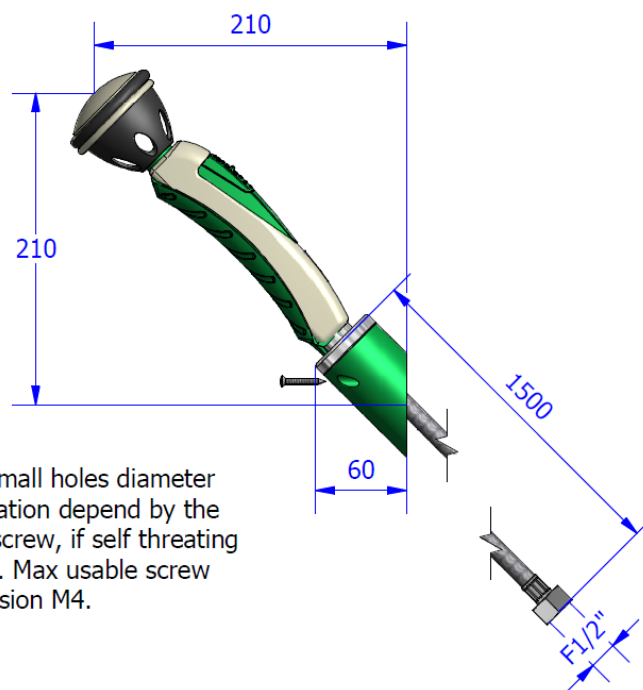

WEIGHT:

- 995 gr.

WARRANTY 2 YEARS