

DESCRIZIONE:

STRAIGHT MOUNTED TAP

Codice disegno: 13050.2MPG514PTRB-

APPLICATION:

- Wall mounting

DETAILS:

- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars
- Ultrasound internally cleaned
- No welding
- No loktite
- Internal low-rugosity surface
- Protective plastic covering

SURFACE PROTECTION:

- Epoxy powder coating

RAL 7035

MATERIALS:

- Brass
- Handle in PP
- O-rings in Viton HD
- Gasket in PVDF
- O2 certified grease

HEADWORK SEALING:

- PVDF temperature working range: 0 - 100°

CONNECTION TAP:

- 1/4"NPT


STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

LEAK RATE DETECTED:

10^{-6} BAR cm^3/sec He

Laboratory test report available

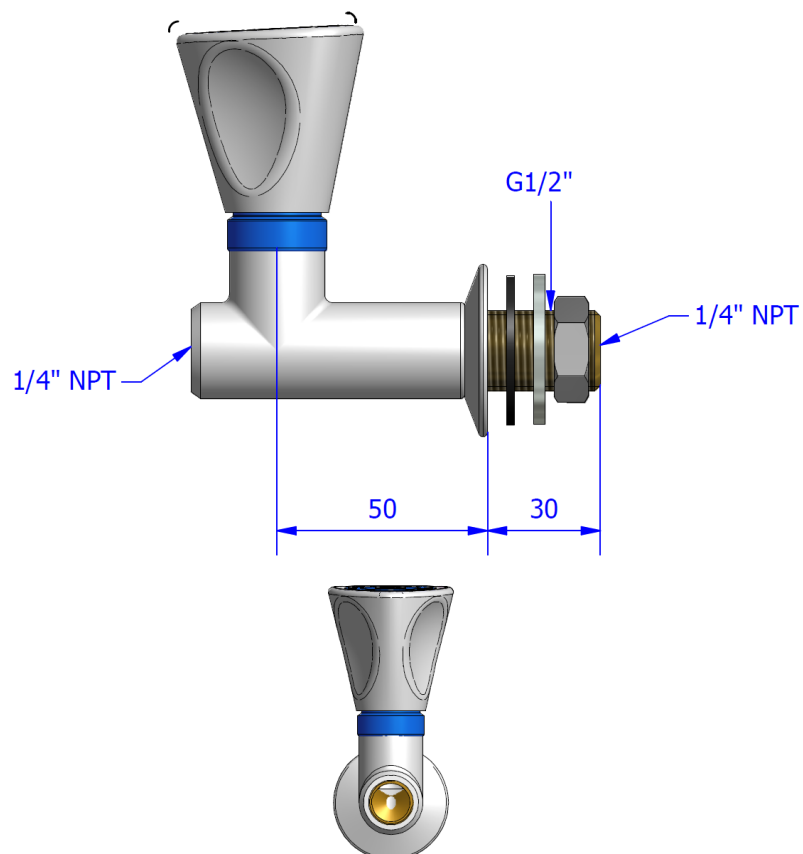

WARRANTY 2 YEARS