


Art. 1100/350 - Floor mounted
emergency shower

Standard EN 15154

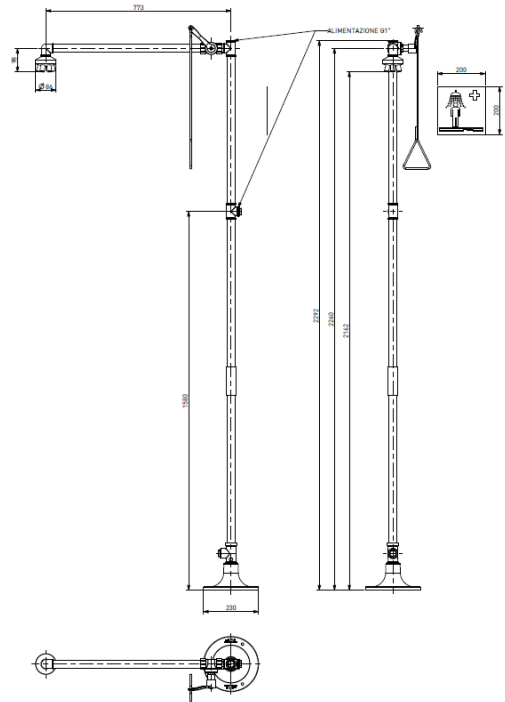

TOF emergency showers have a robust structure and are quick and easy to assemble thanks to factory pre-assembly. The valves are easy to remove, ensuring maximum ease of maintenance. The shower head produces a helical jet with a 2m diameter, fully compliant with the **DIN EN 15154 standard**.

Features

Supply: G1, G3/4, G1/2 (to be connected to the water mains, use drinking water)

Drain: G1

Minimum water pressure required: 2 bar

Water flow:

> 60 l/min (for single head)

> 12 l/min (for double eye-washer)

> 6 l/min (for single eye-washer)

Hoses: galvanised steel

Valve: coated with epoxy paint

Emblem: supplied in accordance with legislation